


# NEOPRENE COATED WELDING DRAPE - MEDIUM DUTY

**FIRECHIEF®**  
making the world a safer place

**MODEL:**

**HSN1-1**  
**HSN1-2**  
**HSN1-3**  
**HSN1-5**

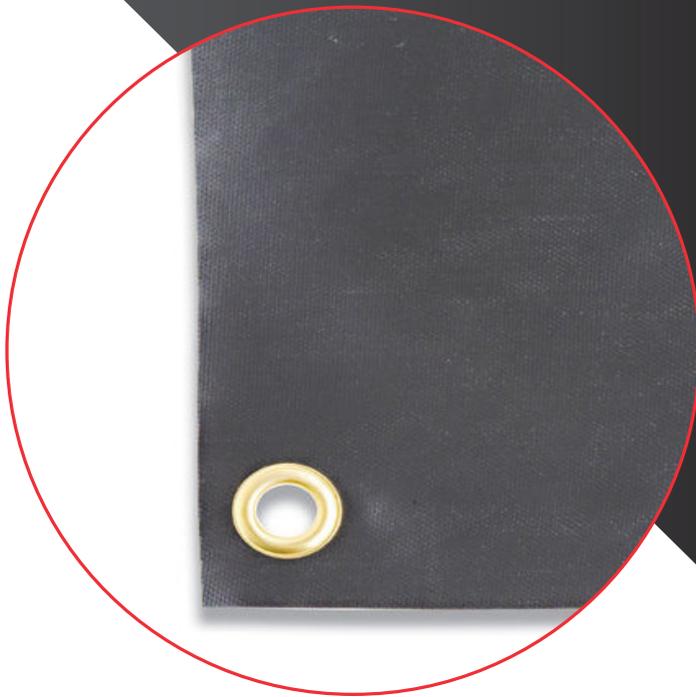

- Glass fabric coated on both sides with fully cured Flame Retardant Black Neoprene Rubber with a dusted finish
- Water resistant (to 4 bar)
- Limited combustability
- Resists sparks and light splatter
- Good abrasion resistance
- Suitable for outdoor exposure (good weather durability)
- For use in areas where oils, greases, dilute acidic / alkalis and vapours are present
- Complete with brass eyelets to secure in position
- Weight of material 850g/m<sup>2</sup>
- 0.6mm thickness
- Service Temperature -50 / 105°C, Short term 150°C, Long term 95°C
- Fire Tested to BS476-7:1987 (as amended) Surface Spread of Flames - Meets Class 1



| Model        | HSN1-1   | HSN1-2   | HSN1-3   | HSN1-5   |
|--------------|----------|----------|----------|----------|
| Product Code | 104-1028 | 104-1029 | 104-1032 | 104-1034 |
| Length (m)   | 1        | 1.2      | 1.8      | 1.8      |
| Width (m)    | 1.2      | 1.8      | 1.8      | 2.4      |
| Weight (kg)  | 1        | 1.8      | 2.8      | 3.7      |

For more information contact: Firechief Global, 3 Lands End Way, Oakham, Rutland, UK, LE15 6RB | Imported into EU by: Sentura Group (Ireland) Ltd, Joyce House, 21-23 Holles Street, Dublin 2, Ireland

 +44 (0) 330 999 0019

 [sales@firechiefglobal.com](mailto:sales@firechiefglobal.com)

 [firechiefglobal.com](http://firechiefglobal.com)